


# Encapsulated Transformer


## EI-60x21mm Series

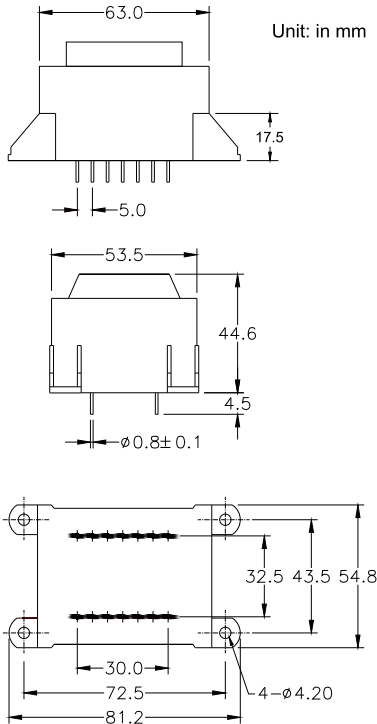


Catalog No	Secondary					Primary Fuse	Ambient Temp. (Ta)	Approval	
	Rated Voltage	Power Rating	Loading Current	No-Load Voltage	Secondary Circuitry			VDE	CE
V60AJ-21A1P7	6.0 V	23.0 VA	3.83 Amp	7.0 V	A	125 mA	70°C	○	●
V60AJ-21A3P7	7.5 V	23.0 VA	3.07 Amp	8.8 V	A	125 mA	70°C	○	●
V60AJ-21A4P7	9.0 V	23.0 VA	2.56 Amp	10.3 V	A	125 mA	70°C	○	●
V60AJ-21A5P7	12.0 V	23.0 VA	1.92 Amp	13.7 V	A	125 mA	70°C	○	●
V60AJ-21A6P7	15.0 V	23.0 VA	1.53 Amp	17.1 V	A	125 mA	70°C	○	●
V60AJ-21A7P7	18.0 V	23.0 VA	1.28 Amp	20.5 V	A	125 mA	70°C	○	●
V60AJ-21A8P7	20.0 V	23.0 VA	1.15 Amp	22.5 V	A	125 mA	70°C	○	●
V60AJ-21A9P7	24.0 V	23.0 VA	0.96 Amp	27.3 V	A	125 mA	70°C	○	●
V60AJ-21A2P7	40.0 V	23.0 VA	0.58 Amp	45.8 V	A	125 mA	70°C	○	●

Catalog No	Secondary					Primary Fuse	Ambient Temp. (Ta)	Approval	
	Rated Voltage	Power Rating	Loading Current	No-Load Voltage	Secondary Circuitry			VDE	CE
V60AJ-21D1P7	6.0 Vx2	23.0 VA	1.92 Amp	7.2 Vx2	D	125 mA	70°C	○	●
V60AJ-21D3P7	7.5 Vx2	23.0 VA	1.53 Amp	8.8 Vx2	D	125 mA	70°C	○	●
V60AJ-21D4P7	9.0 Vx2	23.0 VA	1.28 Amp	10.3 Vx2	D	125 mA	70°C	○	●
V60AJ-21D5P7	12.0 Vx2	23.0 VA	0.96 Amp	13.7 Vx2	D	125 mA	70°C	○	●
V60AJ-21D6P7	15.0 Vx2	23.0 VA	0.77 Amp	17.1 Vx2	D	125 mA	70°C	○	●
V60AJ-21D7P7	18.0 Vx2	23.0 VA	0.64 Amp	20.5 Vx2	D	125 mA	70°C	○	●
V60AJ-21D2P7	20.0 Vx2	23.0 VA	0.58 Amp	22.5 Vx2	D	125 mA	70°C	○	●

Secondary Circuitry: A




Secondary Circuitry: D



### Remarks :

#### 1) Catalog Number System :

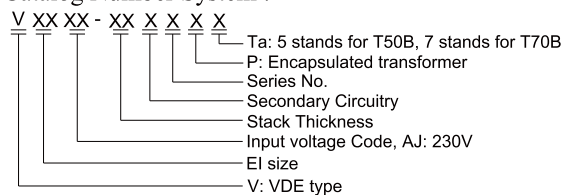

2) Non short-circuit proof safety isolating transformer

3) \* - Non short-circuit proof isolating transformer

4) Temperature Class : B

5) Weight per unit : approximate 580gm

6) ● - Approved

7) ○ - Meet Standard