




# Encapsulated Transformer

## EI-66x23mm Series

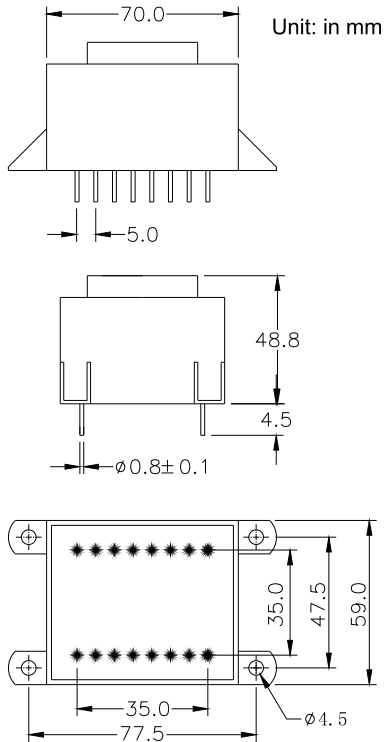


Catalog No	Secondary					Primary Fuse	Ambient Temp. (Ta)	Approval	
	Rated Voltage	Power Rating	Loading Current	No-Load Voltage	Secondary Circuit			VDE	CE
V66AJ-23A1P7	6.0 V	34.8 VA	5.80 Amp	7.2 V	A	160 mA	70°C	○	●
V66AJ-23A2P7	7.5 V	34.8 VA	4.64 Amp	9.0 V	A	160 mA	70°C	○	●
V66AJ-23A3P7	9.0 V	34.8 VA	3.87 Amp	10.8 V	A	160 mA	70°C	○	●
V66AJ-23A4P7	12.0 V	34.8 VA	2.90 Amp	14.4 V	A	160 mA	70°C	○	●
V66AJ-23A5P7	15.0 V	34.8 VA	2.32 Amp	18.0 V	A	160 mA	70°C	○	●
V66AJ-23A6P7	18.0 V	34.8 VA	1.93 Amp	21.6 V	A	160 mA	70°C	○	●
V66AJ-23A7P7	24.0 V	34.8 VA	1.45 Amp	28.8 V	A	160 mA	70°C	○	●

Catalog No	Secondary					Primary Fuse	Ambient Temp. (Ta)	Approval	
	Rated Voltage	Power Rating	Loading Current	No-Load Voltage	Secondary Circuit			VDE	CE
V66AJ-23D1P7	6.0 Vx2	34.8 VA	2.90 Amp	7.3 Vx2	D	160 mA	70°C	○	●
V66AJ-23D2P7	7.5 Vx2	34.8 VA	2.32 Amp	9.2 Vx2	D	160 mA	70°C	○	●
V66AJ-23D3P7	9.0 Vx2	34.8 VA	1.93 Amp	11.0 Vx2	D	160 mA	70°C	○	●
V66AJ-23D4P7	12.0 Vx2	34.8 VA	1.45 Amp	14.6 Vx2	D	160 mA	70°C	○	●
V66AJ-23D5P7	15.0 Vx2	34.8 VA	1.16 Amp	18.3 Vx2	D	160 mA	70°C	○	●
V66AJ-23D6P7	18.0 Vx2	34.8 VA	0.97 Amp	22.0 Vx2	D	160 mA	70°C	○	●
V66AJ-23D7P7*	24.0 Vx2	34.8 VA	0.73 Amp	29.2 Vx2	D	160 mA	70°C	○	●



### Remarks :

#### 1) Catalog Number System :

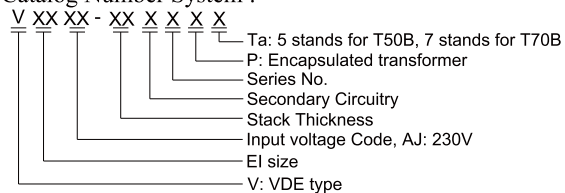

- 2) Non short-circuit proof safety isolating transformer
- 3) \* - Non short-circuit proof isolating transformer
- 4) Temperature Class : B
- 5) Weight per unit : approximate 740gm
- 6) ● - Approved
- 7) ○ - Meet Standard